

Salient Object Detection with Side Information

Qiuning LI, Yidong LI* & Congyan LANG

School of Computer and Information Technology, Beijing Jiaotong University, Beijing 100044, China

Appendix A More Information

Table A1 The MAE, AUC, F-measure under two conditions.

No.	Method	MAE	AUC	F-measure
1	with side information	0.20024	0.84604	0.60372
2	without side information	0.28453	0.81692	0.53689

Table A2 The MAE, AUC, F-measure of our method and other 6 methods.

No.	Method	MAE	AUC	F-measure
1	Ours	0.20024	0.84604	0.60372
2	HS	0.29687	0.79682	0.34968
3	MBD	0.22615	0.84589	0.43687
4	MB+	0.27347	0.81765	0.37865
5	SeR	0.3316	0.74577	0.28967
6	SWD	0.36375	0.75657	0.27656
7	SIM	0.43871	0.70848	0.2387

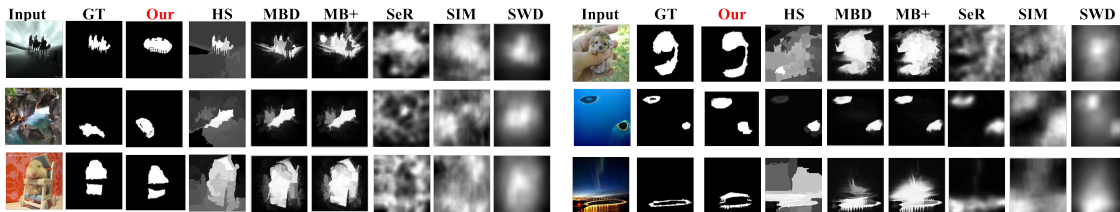


Figure A1 Visual comparison with other 6 methods, including hierarchical saliency detection(HS), minimum barrier distance(MBD), minimum barrier salient object detection(MB+), static and space-time visual saliency detection(SeR), saliency estimation using a non-parametric low-level vision model(SIM), visual saliency detection by spatially weighted dissimilarity(SMD).

References

- 1 Simonyan K, Zisserman A. Very Deep Convolutional Networks for Large-Scale Image Recognition. Computer Science, 2014

* Corresponding author (email: ydli@bjtu.edu.cn)

- 2 Szegedy C, Liu W, Jia Y, et al. Going deeper with convolutions. IEEE Conference on Computer Vision and Pattern Recognition. IEEE Computer Society, 2015:1-9
- 3 Lin M, Chen Q, Yan S. Network In Network. Computer Science, 2013